1920, 1921 and 1925 Series. Fire-resistant panic mortise locks for passive leaf.

Art. 1920/21

- Panic lock for passive leaf.
- Handed.

Art. 1921

- Art. 1921/17 and /21 panic lock for passive leaf.
- Non-handed.

Art. 1925

- Art. 1925/21 narrow style panic lock for passive leaf.
- Handed.

Function

By operating the inside lever handle the upper and lower rods are retracted and the latch bolt in the active lock (Art. 1901/21 and 1905/21) pushed back, which opens both doors.

In unlocked position

The rods are held in unlocked position by the automatic relatching device. When closing the passive door, the rods are brought back in locked position automatically.

In locked position

Upper and lower rod can not be operated simultaneously.

Do not use lever handle from outside on Art. 1920, 1921 and Art. 1925.

Accessories

See pages 28, 29, 32 and 33.

Art. 1921
Standards Art. 1921: EN 1125
Standards Art. 1920 and 1925: none

	1920/21	1921/17	1921/21	1925/21
Backset 65 mm		●	●	
Backset 40 mm				●
Backset 95 mm	●			
9 mm follower	●	●	●	●
Steel, zinc-plated front plate 24 x 235 mm rounded	●		●	
Steel, zinc-plated front plate 24 x 350 mm rounded				●
Stainless steel front plate 24 x 235 mm rounded		●		
Steel, zinc-plated lock case	●	●	●	●
Non-handed		●	●	
Handed	●			●
Packed per piece			●	
Packed per 25 pieces	●	●	●	●

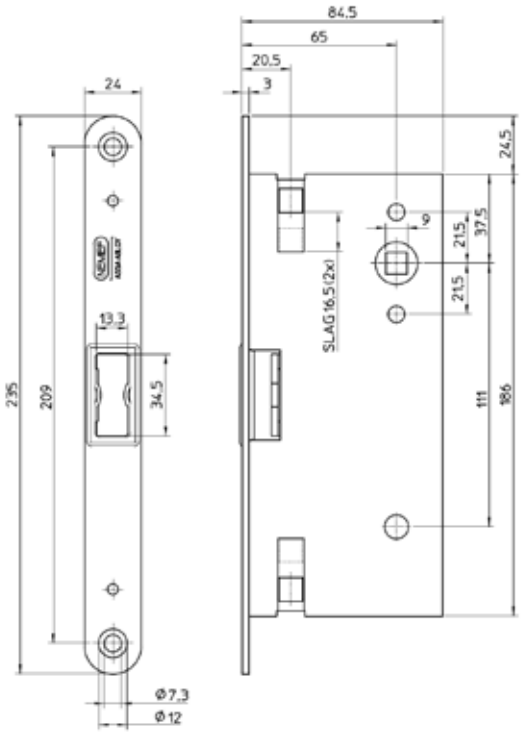

Art. 1921/21