


The universal strike in a solid design

14RR------D11

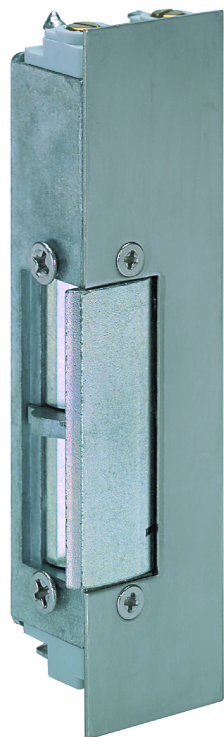

Product description

Model with monitoring contact as potential-free changeover contact. This is actuated by the latch bolt via a slide.

Overview of Advantages

- Suitable for all common striking plates
- Can be combined with striking plates with latch guide (model St.)
- Reversible design = DIN right (DR=5)

Scope of delivery

- 1 piece electric strike

Note

- Order code for version DIN right = 14ARR

Technical data

DIN direction	Universal
potential	6-12 V AC/DC
Monitoring contact (RR)	Yes
Fail-locked	Yes
Contact loading capacity	1 A
Rated resistance	7,7 Ohm
Current consumption AC 12 V	1100 mA
Current consumption AC 6 V	550 mA
Current consumption DC (50% Residual ripple) 12 V	1480 mA
Current consumption DC (50% Residual ripple) 6 V	740 mA
Current consumption DC (stabilized) 12 V	1560 mA
Current consumption DC (stabilized) 6 V	780 mA
Break-in resistance	5000 N
Height	120 mm
Width	20,5 mm
Depth	28 mm
Operating temperature range	-15 °C to +40 °C
Installation position	Vertical and horizontal
Material housing	Zinc die-cast
Latch material	Steel
Max. latch preload AC operation 6 V	160 N
Max. latch preload AC operation 12 V	160 N
Max. latch preload DC (50% ripple) 40 N 6 V	
Max. latch preload DC (50% ripple) 100 N 12 V	
Max. latch preload DC (stabilised) 10 N 6 V	
Max. latch preload DC (stabilised) 60 N 12 V	

Article number	14RR-----D11
EAN-Number	4042203041097

